



Model 675SO2 *Seal Only version*

- Outstanding Value
- Unmatched Product Quality
- Time-Controlled Heating
- Made in USA



Performance

The 675SO2 sealer is a “seal only” version of our popular 675SV2 SmartVAC2 product. Using time-controlled impulse heat technology, the 675SO2 integrates a high resolution HMI digital display and updated PLC controls, resulting in improved user interface and reliability. The 675SO2 is built to handle the most challenging industrial production environments, with intuitive user-friendly controls that operators can learn in minutes. Open ended seal bars accommodate ease of packaging insertion and improved production efficiency. Heating is provided by the lower seal bar. Standard safety features include low pressure jaw close and emergency stop switch. The 675SO2 sealer is designed for tabletop or stand-mounting, allowing for ease of relocation and sealer orientation to meet unique production requirements. An optional product support tray is available to accommodate a variety of product package sizes and configurations.

Value and Delivery

The 675SO2 is economically designed with the features you need, eliminating costly custom add-ons and lengthy delivery time.

Customer Service

Our dedicated sales and technical support teams are knowledgeable and ready to assist you when you call about your application. We work to set the industry standard for responsiveness and service to both existing and new customers.

Built-to-Last Reliability

Accu-Seal machines are designed and built with the highest quality components and manufacturing techniques to ensure unmatched product quality and many years of reliable, trouble free service. Accu-Seal machines are designed for fast and easy installation, operation, and maintenance.

The 675SO2 offers an affordable and flexible option to meet a wide range of packaging needs.

675SO2 Seal-Only

Two-Year Limited Warranty

We are confident with the quality and reliability of our products and offer a Two-Year Limited Warranty for most Accu-Seal machines. For further details please contact the Accu-Seal Sales Department. Accu-Seal machines are designed and manufactured with pride in the USA.

Compare the Features. Experience the Difference.

Call your Accu-Seal Representative today to learn more.

Ph: 800-452-6040 or 760-591-9800 Email: info@accu-seal.com

675SO2 Sealer- Seal only operation

Equipment Specifications

OPERATING MODE

- 675SO2
- Seal only

SPECIFICATIONS

- Seal lengths: 20", 25", 30"
- Seal widths: 1/4" standard

REQUIREMENTS

- Power:
 - 110 Vac, 15A
 - 220 Vac, 10A
- Air: Requires a clean, dry compressed air source
 - 1.0 CFM @ 90 PSI

STANDARD FEATURES

- Single Recipe
- Lower bar heat sealing
- High Resolution HMI digital display
- Open-end seal bars with 1/4" wide heating element
- Electric foot switch activation
- E-Stop button
- Low-pressure jaw close with obstruction safety feature
- Pressure regulator and gauge
- Internally exhausted pneumatics
- Rigid steel case with powder coat finish

OPTIONS AVAILABLE

- Product support tray
- 10 Recipes
- 3/8" seal width
- CE certification
- Several Ergonomic machine stand options
 - Fixed height (shown to the right)
 - Crank jack style height adjustable
 - Electrical actuator type height adjustable
- External isolated exhaust port


CLEANROOM FEATURES

- Non-particle generating air powered control system.

Overall Size:

- Length: Seal length + 3.5"
- Depth: 16" (without product support tray)
- Height: 8"

Approximate Weight: 62 Lbs.

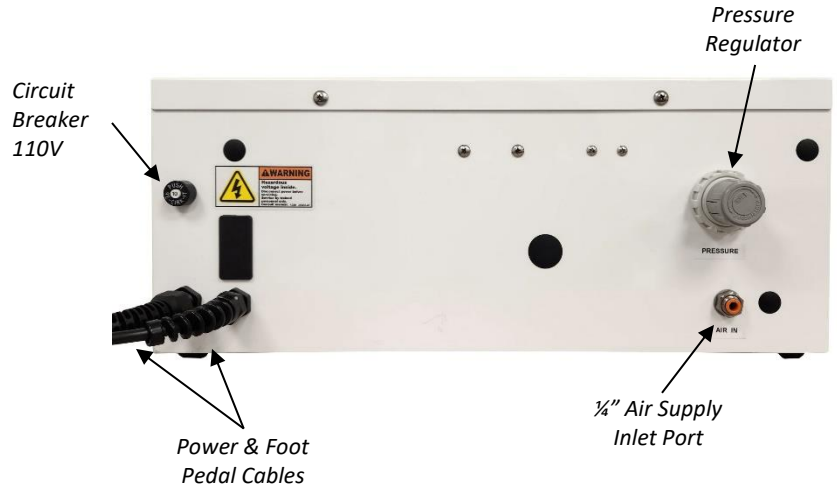

Features and specifications subject to change without notice.